


NOVUstick

for a subsequent horizontal barrier
technical data sheet

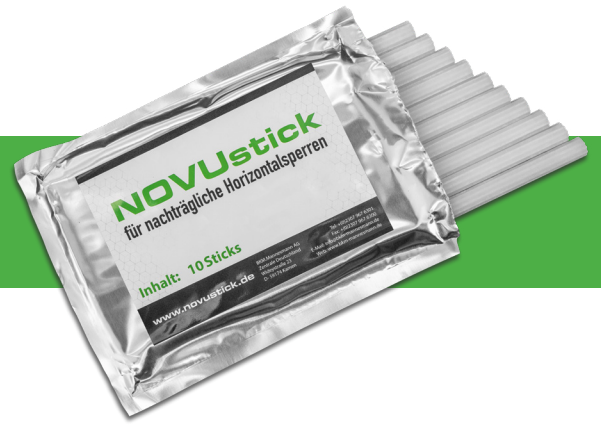

Article-No.: P-001-120 1 Packet (10 Sticks)
Article-No.: P-001-130 1 Parcel (50 Sticks)

Product description

Properties

NOVUsticks are fiber sticks soaked in water-repellent material that are inserted into boreholes to create a subsequent horizontal barrier. This creates an effective barrier against rising damp in the area of the boreholes.

Application areas

In damp masonry that is exposed to rising damp due to a lack of a horizontal barrier.

Product application

Application

Find the lowest accessible continuous mortar joint. Mark the drill attachment points here at a regular distance of 12cm from each other along the row of joints. Select a 12mm drill bit (we recommend the BKM Quattro Drill hammer drill bit). Ensure sufficient attachment length for the required drill hole depth to match the wall thickness.

Drill holes to the recommended depth. Reduce the drilling pressure about 4cm before the end of the drill hole to prevent damage to the back of the wall. Clean the drill holes from drill dust.

Be sure to wear protective gloves during processing! The NOVUsticks are 18cm long and fit exactly on a wall thickness of 24cm. If the wall thickness is smaller or thicker, they must be adjusted to the corresponding length. Sink the sticks completely into the drill hole.

After inserting the NOVUsticks into the soaked masonry, the drill hole can finally be sealed with plaster-free mortar.

Consumption per meter

Wall thickness:	12cm	24cm	36cm	48cm
Quantity:	4 Sticks	8 Sticks	12 Sticks	16 Sticks

Comments

Packaging unit

1 Packet (10 Sticks)	Article-Number: P-001-120
1 Parcel (50 Sticks)	Article-Number: P-001-130

Storage

Store flat, cool and dry

Storability

1 year in unopened package

Legal notice

The above information, in particular the suggestions for processing and use of our products, are based on our knowledge and experience under normal circumstances, provided that the products have been stored and applied correctly. Due to the different materials, substrates and divergent working conditions, a guarantee of a working result or a liability, regardless of the legal relationship, cannot be justified on the basis of these instructions or verbal advice, unless we are accused of intent or gross negligence in this respect. In this respect, the user must prove that all knowledge necessary for a proper and promising assessment by BKM was provided to BKM in writing, in time and in full. The user must check the suitability of the products for the intended application. We reserve the right to make changes to product specifications.

Proprietary rights of third parties must be respected.

The latest product data sheet applies and must be requested from us. The responsibility for the successful application of our products lies with the user, as the use is beyond our control. However, we ensure the quality of our products in accordance with our conditions of sale and delivery, without guaranteeing the success of their application. Our data sheets represent advice based on our best knowledge, but no obligation can be derived from them. Our written consent is required to guarantee properties and application possibilities that go beyond the information recorded in the data sheets.

Further information can be found at:

www.bkm-mannesmann.de

You can find a detailed video on the application on our Youtube channel or simply scan the code →→



